


Product Profile Dimensions




PS10 - "ODL" (Offset Deep Leg) Profiles with two offset solid legs


Composite Fire Stop/Framing "offset step" accommodates fireproofing up to 1 1/2" thick in head of wall and wall to wall (column) assemblies. Provides 100% unencumbered joint protection accommodates up to 3" overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating with two solid legs per UL listed assemblies.

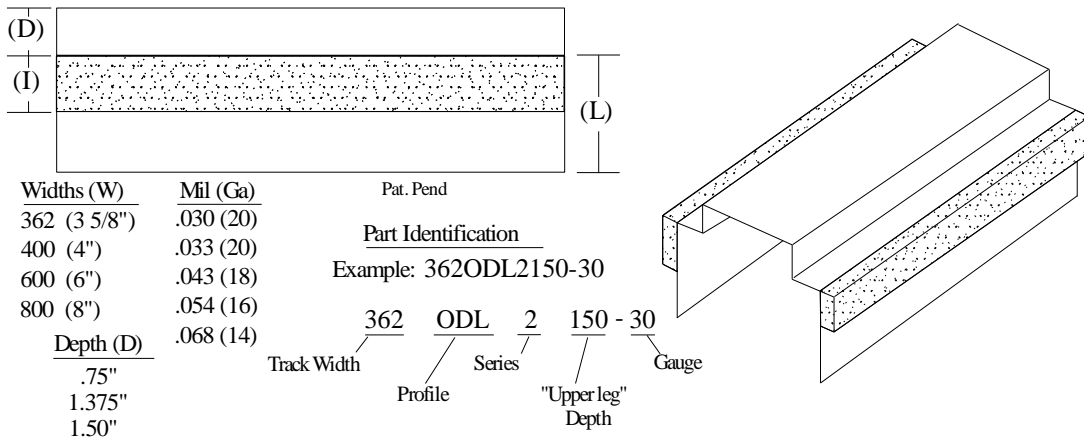

1 - Series "Deep Leg" (Fire Stop One Side)

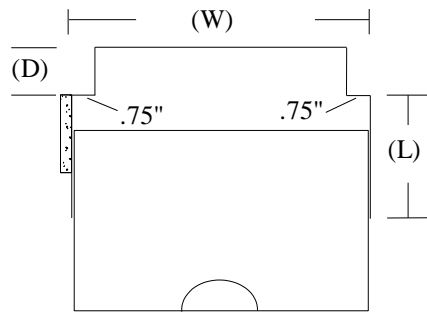

2 - Series "Deep Leg" (Fire Stop Both Sides)

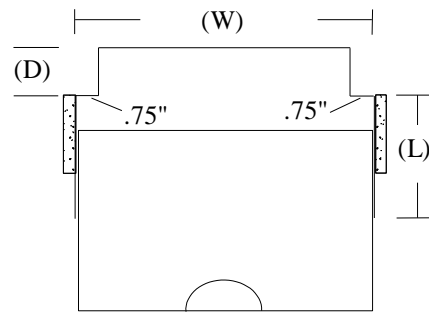

Profile	Lower Leg Length (L)	Strip Width (I)	Slot Height (S)	Joint Protection
ODL	2.00"	1.00"	N/A	.75"
ODLW	2.00"	1.25"	N/A	1.00"
ODLX	2.50"	1.75"	N/A	1.50"
ODLZ	3.00"	2.25"	N/A	2.00"
ODLY	3.75"	3.25"	N/A	3.00"

UL, ASTM & Code Standards

UL2079, E814, E1966, ULC S115-M95
 A1003, A653, A924, C645, C754, C955
 AISI 2004 NAS
 2006 & 2009 IBC
 2007 CBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts
 MR 5.1 & 5.2 - Regional Proximity
 EQ 4.1 - Low Emitting Materials
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300