


# Product Profile Dimensions





## PS12 - "OJR" (Offset J-Runner) with one 2" and one 3" solid legs

Composite Fire Stop/Framing with "offset step" accommodates fireproofing up to 1 1/2" thick in shaft wall assemblies. Provides 100% unencumbered joint protection accommodating up to 1 1/2" overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating with one 2" and one 3" solid lower legs per listed assemblies in UL Fire Resistance Directory.

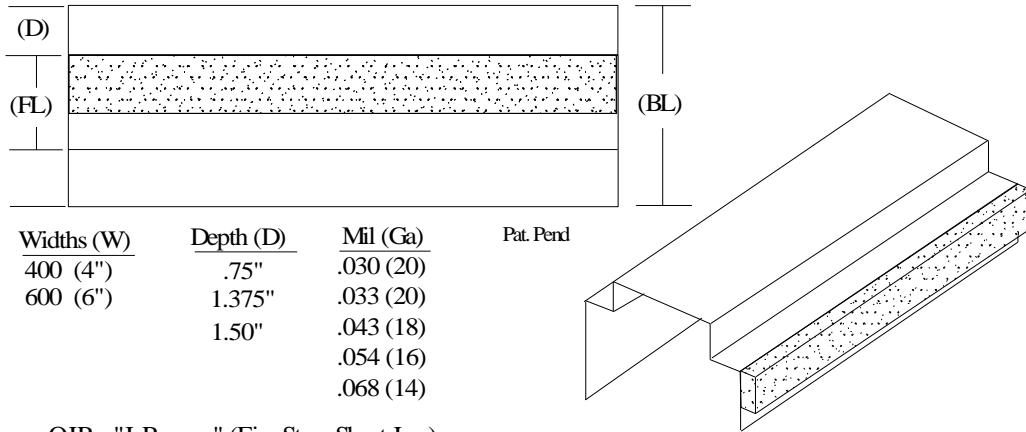

### OJR - "J-Runner" (Fire Stop Short Leg)

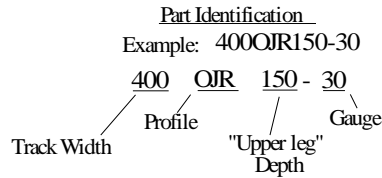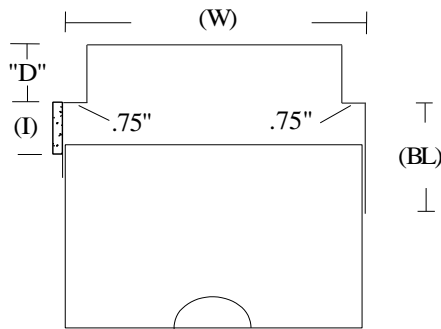

Profile	Front Leg (FL)	Back Leg (BL)	Strip Width (I)	Joint Protection
OJR	2.00"	3.00"	1.00"	.75"
OJRW	2.00"	3.00"	1.25"	1.00"
OJRX	2.00"	3.00"	1.75"	1.50"

### UL, ASTM & Code Standards

UL2079, E814, E1966, ULC S115-M95  
 A1003, A653, A924, C645, C754, C955  
 AISI 2004 NAS  
 2006 & 2009 IBC  
 2007 CBC

### Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts  
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts  
 MR 5.1 & 5.2 - Regional Proximity  
 EQ 4.1 - Low Emitting Materials  
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300