



Product Profile Dimensions

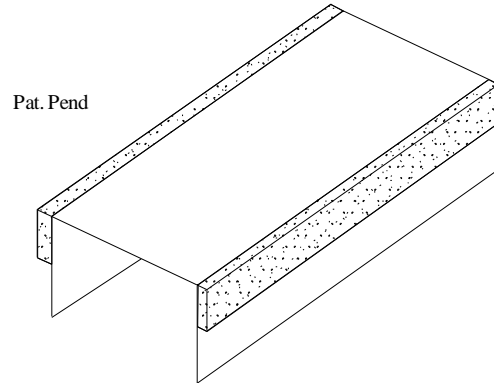



PS13 - "VT" (Vertical Joint) profiles with two solid legs

Composite Fire Stop/Framing for use in up to 2 hr rated wall assemblies. Provides protection of vertical joints at wall intersection with "dissimilar" material (concrete or steel column/walls). Minimum G40 (20ga) and G60 (18ga and heavier) coating with two solid legs per UL listed assemblies in UL Fire Resistance Directory.

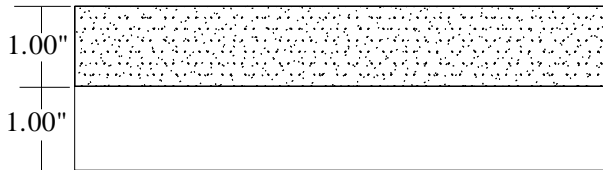

Widths (W)	Gauge	Part Identification
250 (2 1/2")	.030 (20)	Example: 362VT2 - 30
362 (3 5/8")		
400 (4")		
600 (6")		
800 (8")		

362	VT	2	-	30
Track Width	Profile	Series		Gauge

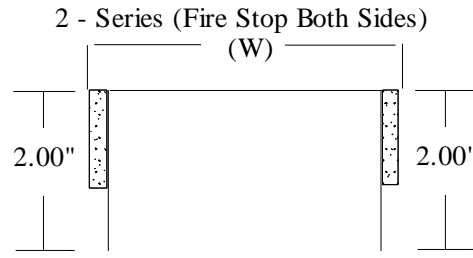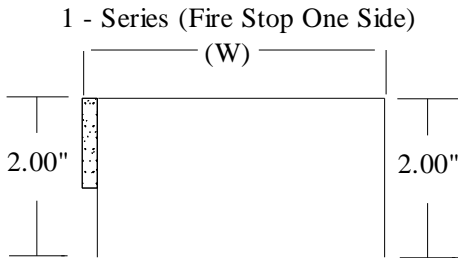

UL, ASTM & Code Standards

UL2079, E814, E1966, ULC S115-M95
 A1003, A653, A924, C645, C754, C955
 AISI 2004 NAS
 2006 & 2009 IBC
 2007 CBC

Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts
 MR 5.1 & 5.2 - Regional Proximity
 EQ 4.1 - Low Emitting Materials
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300