


Product Profile Dimensions



PS15 - "FC" (Flute Cover) profiles

Corrugated Strap for horizontal use to span fluted areas of unprotected or protected metal decks in up to 2 hr rated assemblies. Profile attached to deck "valley" surfaces a max 16" O/C on both sides. Profile sections are fabricated from hot-dipped galvanized steel complying with ASTM A653 with a minimum G40 (20ga) and G60 (18ga and heavier) coating. Profiles comply with ASTM C645 and provide a surface area for attachment of head of wall partition track profiles centered or offset underneath and parallel to deck fluted areas.


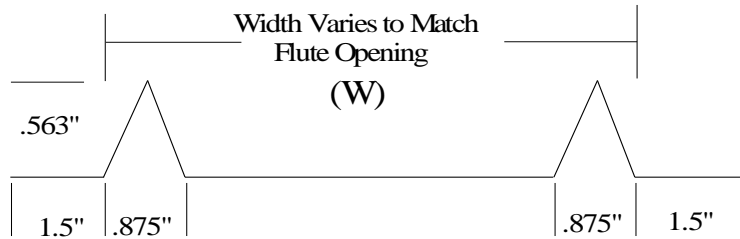


Part Identification

Example: FC750 - 30

<u>Widths (W)</u>
350 (3 1/2")
550 (5 1/2")
750 (7 1/2")
950 (9 1/2")

<u>Gauge</u>
.030 (20)

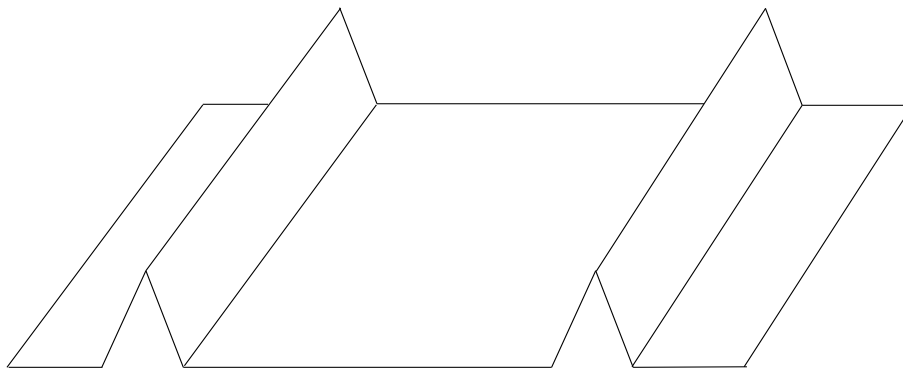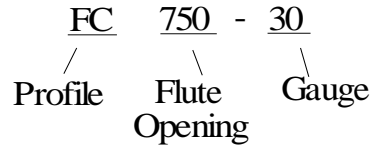

UL, ASTM & Code Standards

UL2079, E814, E1966, ULC S115-M95
 A1003, A653, A924, C645, C754, C955
 AISI 2004 NAS
 2006 & 2009 IBC
 2007 CBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts
 MR 5.1 & 5.2 - Regional Proximity
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300