


Product Profile Dimensions



PS42 - "ECA" (End Cap Angle) to Cap Track Ends

Composite Fire Stop/Framing for use in up to 2 hr rated wall assemblies. Provides 100% unencumbered joint protection accommodates up to 3" overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating installed in end of track profiles (exterior corners) with fire stop facing outward towards rated joints.

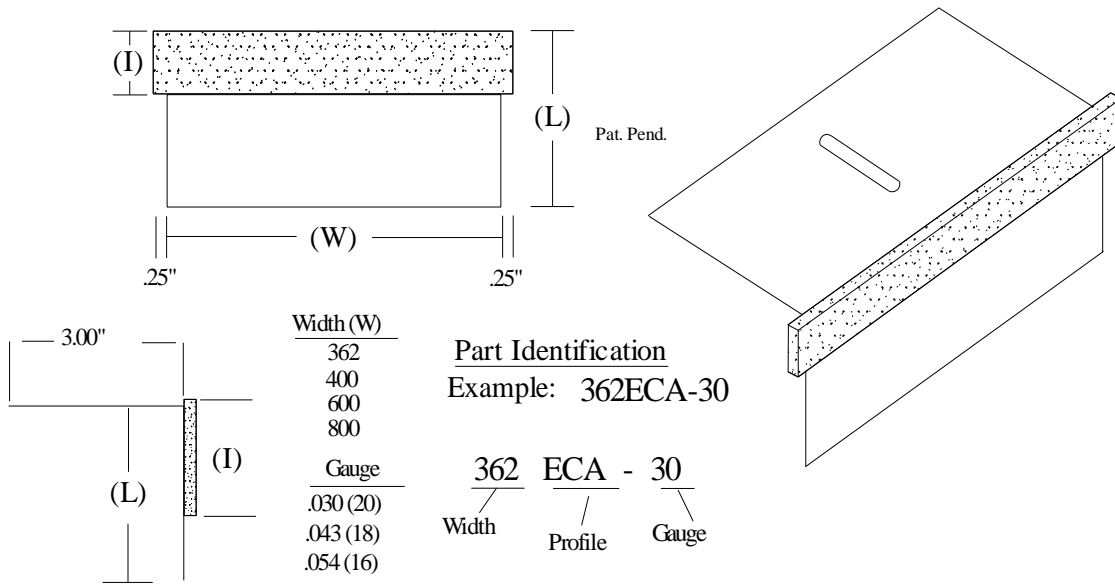

Profile	Leg Length (L)	Strip Width (I)	Slot Height (S)	Joint Protection
ECA	2.00"	1.00"	N/A	.75"
ECAW	2.00"	1.25"	N/A	1.00"
ECAX	2.50"	1.75"	N/A	1.50"
ECAZ	3.00"	2.25"	N/A	2.00"
ECAY	4.00"	3.25"	N/A	3.00"

UL, ASTM & Code Standards

UL2079, E814, E1966, ULC S115-M95
 A1003, A653, A924, C645, C754, C955
 AISI 2004 NAS
 2006 & 2009 IBC
 2007 CBC

Leed Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts
 MR 5.1 & 5.2 - Regional Proximity
 EQ 4.1 - Low Emitting Materials
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300