


Product Profile Dimensions



PS43 - "FSP" (Flat Strap Patch) to Span Vertical MEP Cutouts

Composite Fire Stop/Framing for use in up to 2 hr rated wall assemblies. Provides 100% unencumbered joint protection accommodates up to 3" overall movement with level III (seismic) certification. Minimum G40 (20ga) and G60 (18ga and heavier) coating installed over field modified (cutout sections of track profiles to accommodate vertical obstructions) attach each end with a fastener on either side of field modification.

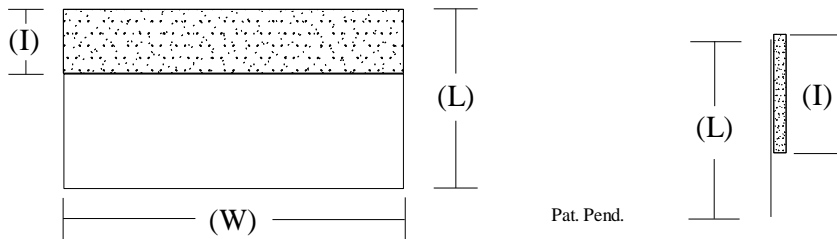

<u>Gauge</u>	<u>Lengths</u>
.030 (20)	4.00"
	6.00"
	8.00"
	10.00"

Part Identification
 Example: 600FSP-30

600	FSP	-	30
/	/		/
Length	Profile		Gauge

Profile	Leg Length	Strip Width	Slot Height	Joint
	(L)	(I)	(S)	Protection
FSP	3.00"	1.00"	N/A	.75"
FSPW	3.00"	1.25"	N/A	1.00"
FSPX	3.00"	1.75"	N/A	1.50"
FSPZ	3.00"	2.25"	N/A	2.00"
FSPY	4.00"	3.25"	N/A	3.00"

UL, ASTM & Code Standards

UL2079, E814, E1966, ULC S115-M95
 A1003, A653, A924, C645, C754, C955
 AISI 2004 NAS
 2006 & 2009 IBC
 2007 CBC

Lead Points

MR 2.1 & 2.2 - Construction Waste: up to 2pts
 MR 4.1 & 4.2 - Recycled Content: up to 2 pts
 MR 5.1 & 5.2 - Regional Proximity
 EQ 4.1 - Low Emitting Materials
 EQ 9 - Enhanced Acoustical

Phone: (425) 869-2811 Fax: (425) 869-2300